


ALUMINIUM NARROW SCAFFOLDING

- Single platform with trapdoor for areas where space is a constraint
- Ladder frame allows easy ascent to the top
- Light weight, easy assembly/disassembly method, non-corrosive and visually appealing tower compared to steel
- Braces, rungs and pipes fluted for extra grip and strength
- Precise uniform tig welding and notching performed to secure parts firmly
- Maximum working height 12m; towers above 10m must be secured to other structure
- Stabilizers provide further stability
- Single brake heavy duty 5" castor wheels capable of holding up to 400kg load capacity, heavy duty 8" wheels with brake and release option, capable of holding up to 600kg load capacity/wheel
- Option to work at several heights and one time, by using additional platforms
- Minimal storage space, due to less number and size of parts

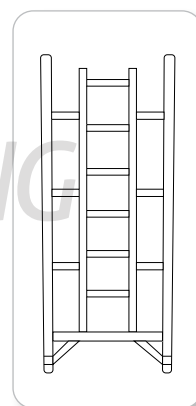

ALUMINIUM NARROW SCAFFOLDING 0.85 M WIDTH X 2.0 M LENGTH												
LOAD CAPACITY: 250 KG PER PLATFORM 750 KG PER TOWER												
TOWER CODE		NAR 2	NAR 3	NAR 4	NAR 5	NAR 6	NAR 7	NAR 8	NAR 9	NAR 10	NAR 11	NAR 12
TOWER HEIGHT		2.3 M	3.1 M	4.2 M	5.2 M	6.4 M	7.2 M	8.4 M	9.2 M	10.4 M	11.2 M	12.4 M
PLATFORM HEIGHT		1.0 M	2.0 M	3.4 M	4.2 M	5.2 M	6.2 M	7.2 M	8.2 M	9.2 M	10.2 M	11.2 M
WORKING HEIGHT		3.0 M	4.0 M	5.4 M	6.2 M	7.2 M	8.2 M	9.2 M	10.2 M	11.2 M	12.2 M	13.2 M
ACCESSORIES												
LADDER FRAME	2.0 M	1	1	2	2	3	3	4	4	5	5	6
SPAN (4 RUNG FRAME)	2.0 M	1	1	2	2	3	3	4	4	5	5	6
GUARD RAIL FRAME	1.0 M	0	2	0	2	0	2	0	2	0	2	0
HORIZONTAL BRACE	2.0 M	4	6	6	6	8	8	8	10	10	10	12
DIAGONAL BRACE	2.2 M	2	4	6	8	10	12	14	16	18	20	22
STABILIZER	2.0 M	0	*	4	0	0	0	0	0	0	0	0
STABILIZER	3.0 M	0	0	0	4	4	4	0	0	0	0	0
STABILIZER	4.5 M	0	0	0	0	0	0	4	4	4	4	0
STABILIZER	6.0 M	0	0	0	0	0	0	0	0	0	0	4
TOEBOARD		1	1	1	1	1	1	1	1	1	1	1
CASTOR WHEEL - 5"		4	4	4	0	0	0	0	0	0	0	0
CASTOR WHEEL - 8" W/ ADJUSTABLE LEG		0	0	0	4	4	4	4	4	4	4	4
PLATFORM - TRAPDOOR		1	1	1	1	2	2	2	3	3	3	4

Installation works
Maintenance
Ceiling and A/C work
Painting contractors
Construction work
Industrial use
Cleaning jobs
Shafts and narrow work areas

TECHNICAL FEATURES ARE INDICATIVE AND CAN BE MODIFIED WITHOUT PRIOR NOTICE
CUSTOMISED SIZES POSSIBLE BASED ON REQUEST AND MOQ

* Optional items recommended as per highest safety standards