



# LIGHT ACCESS SINGLE LADDER

- Unique edged rectangular channel construction gives greater strength than C-channel or regular box rectangular sections
- Hard Aluminium Alloy increases strength of overall features and has stronger mechanical properties than other common alloys
- Ribbed channels and steps with anti-slip features allow greater grip when ascending/descending
- Mar-resistant end gaps are non-marking
- Box step offers greater strength and comfort than round or D-shape steps
- Rung crimped onto channel for robustness and strength
- Economically priced ladder

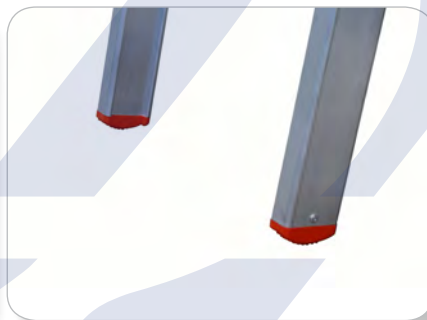

LIGHT ACCESS SINGLE LADDER				
LOAD CAPACITY: 125 KG				
ITEM CODE	STEPS	APPROXIMATE HEIGHT		APPROXIMATE WEIGHT
		METRES	FEET	KILOGRAMS
LASL 5	5	1.8	5'11"	2.9
LASL 6	6	2.1	6'11"	3.5
LASL 7	7	2.4	7'10"	4.1
LASL 8	8	2.7	8'10"	4.4
LASL 9	9	3	9'10"	4.9
LASL 10	10	3.3	10'10"	5.4
LASL 11	11	3.6	11'10"	5.8
LASL 12	12	3.9	12'10"	6.3
LASL 13	13	4.2	13'9"	6.8
LASL 14	14	4.5	14'9"	7.3
LASL 15	15	4.8	15'9"	7.7
LASL 16	16	5.1	16'9"	8.2
LASL 17	17	5.4	17'9"	8.6
LASL 18	18	5.7	18'8"	9
LASL 19	19	6	19'8"	9.5

**+ ADDITIONAL OPTION**



HOOK

TECHNICAL FEATURES ARE INDICATIVE AND CAN BE MODIFIED WITHOUT PRIOR NOTICE

Suited for electrical works:

Light Access

Construction

Roadworks

Sewerage

Steel Scaffolding Access