

BULWARK LADDER

VARIED LOAD CAPACITY

ALSO KNOWN AS ALUMINIUM STAIRCASE

Product Features:

- Also use in steel access scaffolding.
- Can be used for trailer/container access.
- To traverse higher platform/podium levels.
- Various locking provisions based on area of use.
- Max 5 metre length (above 3m additional bracing provisions may be required).
- 45° slant/slope ideal for ascent and descent (60° also available).
- Sturdy 38mm o/d handrail for safer assisted climb (single or double handrail is possible).



Top Section Landing Connection

Step / Shoe option

Handrail option

a) Hook Flat

b) Base Plate



Product Code: **BLWRK**

Standard Dimensions:

Step angle: 45° (standard) / 60° (optional)
Step interval: 200mm (45°) / 250mm (60°)
Step depth: 240mm (45°) / 180mm (60°)
Step width: min 500mm - max 1000mm
Handrail height: based on ladder angle
Vertical height: from 1m to 5m

For steel access scaffolding:


- 1) Ledger dimensions
- 2) Pipe/tube dimensions
- 3) Handrail options
- 4) Load capacity

Important Note:

Please verify dimensions of workspace as Landing Area will determine rest of ladders dimensions and appropriate counterweight provision needs to be provided to avoid ladder from tipping over.

Reach® Ladders & Scaffolding

Product Dimensions:

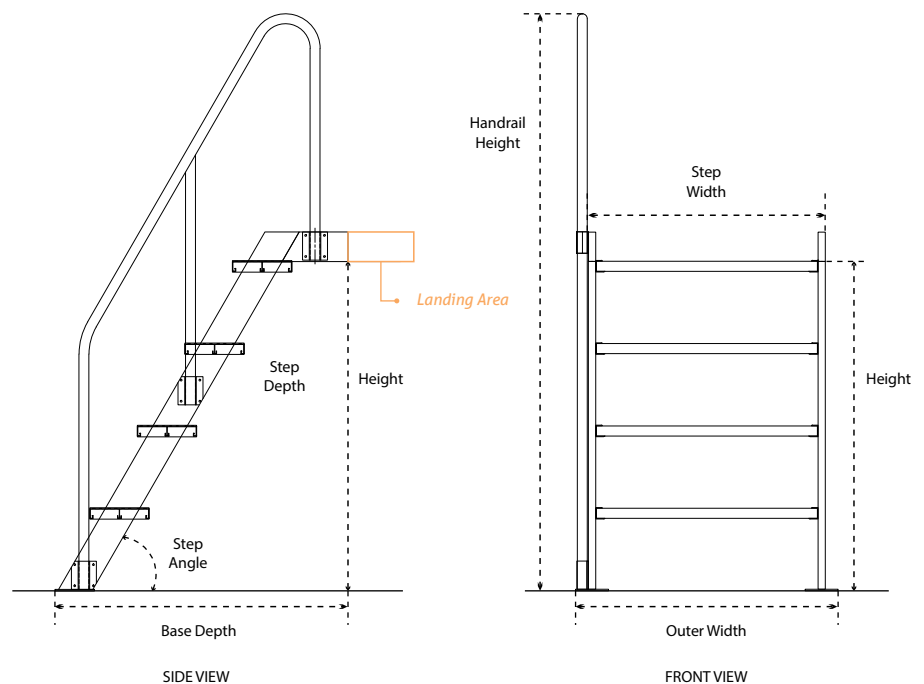

Reach for the skies